


TI-1720




TI-1730, TI-1740

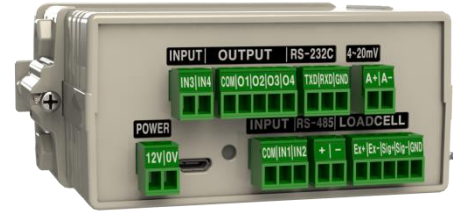

TI-1710

Battery

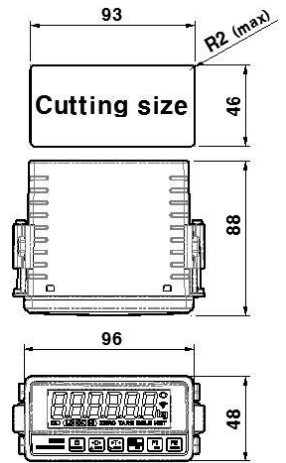

FEATURE

- ◆ DIN size indicator
- ◆ Standard : RS-485(isolation), input 2 PORT(isolation)
- ◆ options
 - ZigBee or Bluetooth wireless
 - RS-232 - INPUT 2 - OUTPUT 4
 - 1~10V - 4~20mV

MODEL	TI-1710	TI-1720	TI-1730	TI-1740	TI-1750
Display	6digit FSTN LCD (Height : 15mm) and amber LED backlight				
Input sensitivity	Up to 0.2uV/D				
Input signal range	0~10mV				
Non linearity	<±0.0015% of FSR max.				
Load cell excitation	DC 3.3V± 5%, 300mA (Up to 8 unit of 350ohm)				
External resolution	Up to 100,000counts				
Operating temperature	-10°C ~ 40°C				
Product weight	Approx. 300g				
input	2	4	4	4	4
output	-	4	4	4	-
RS-485	Yes				
RS-232C	-	Yes	Yes	Yes	-
0~10V	-	-	Yes	-	-
4~20mA	-	-	-	Yes	-
장거리 무선					500m
Power	DC3~5V(micro USB) 9 ~ 28VDC, 1A		12 ~ 28VDC, 1A		DC3~5V(micro USB) 9 ~ 28VDC, 1A



TI-1750(ID 1)



TI-1750F(ID 2)




TI-1750F(ID 3)



TR-1700F



RS-485,RS-232C, USB to serial

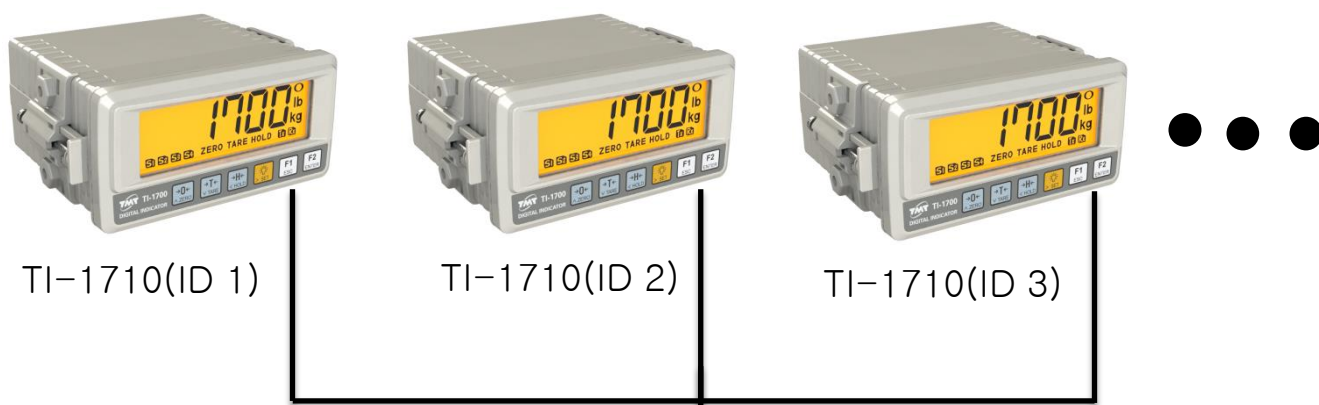

RS-485,RS-232C, USB to serial